


ASPIRA-aXA

TECHNICAL INFORMATION

ASPIRA-aXA

XL-OPTIC
MONOFOCAL
MONOBLOC
ACRYLIC
ASPHERIC
PRELOADED

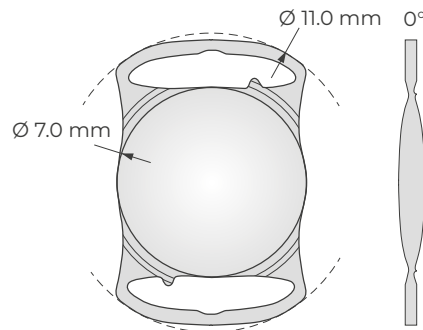

Type

- foldable posterior chamber IOL, one-piece
- plate with cut-out haptics
- available in preloaded Safeloader autoloading container or Compact Line

Material

- hydrophilic acrylic with UV-absorber
- water content 26 % at 35° C
- Abbe number 56

Specifics

- aberration free¹
- aspheric anterior surface
- posterior surface with 360° lens epithelial cell barrier

Diopter Range

Sphere in 0.5 D steps
(optic shape)

10.0 to 30.0 D
(biconvex)



Sphere in 1.0 D steps
(optic shape)

-10.0 to 9.0 D
(concave-convex)



Est. A-const

For a complete list of recommended constants,
please visit www.humanoptics.com

¹ The word „aberration“ as used in this document refers to „spherical aberration“
SL = Safeloader | CL = Compact Line

CE 0197

 HumanOptics Holding AG

Spardorfer Str. 150 · 91054 Erlangen · Germany · Phone +49 (0) 9131 50 66 5-0 · Fax +49 (0) 9131 50 66 5-90
mail@humanoptics.com · www.humanoptics.com