


TORICA-aA / -aAY

TECHNICAL INFORMATION

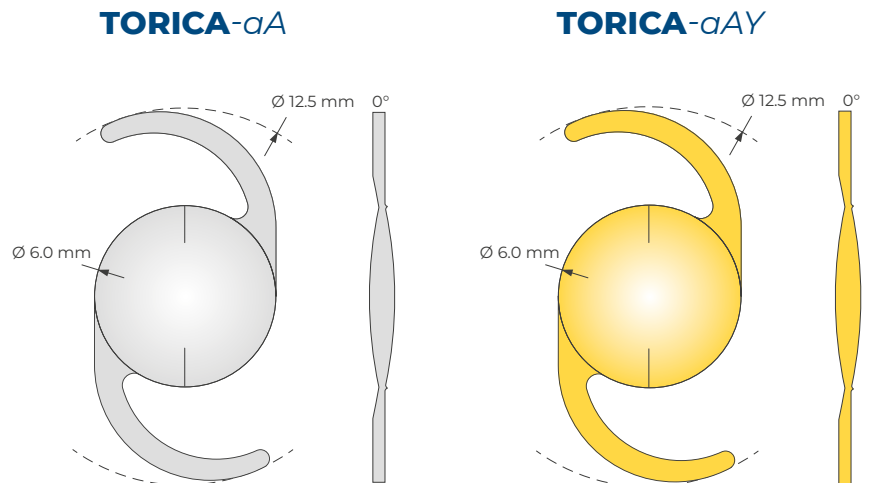

Type

- foldable toric posterior chamber IOL
- one-piece with C-loop haptics
- available in Compact Line

Material

- hydrophilic acrylic with UV absorber
- water content 26 % at 35° C
- blue-light protection optional
- Abbe number 56

Specifics

- toric aspheric anterior surface, omnidirectional aberration free¹
- 360° lens epithelial cell barrier

Dioptr Range

For more details on dioptr categories, see page 2

SE in 0.5 D steps

-20.0 to 60.0 D **CL**

Cylinder in 0.5 D steps

1.0 to 20.0 D (-20.5 D ≤ Meridian ≤ 60.5 D)

Cylinder Axis

The two thin diametrically opposed lines in the periphery of the optic indicate the axis of the plus-cylinder


Est. A-const¹

For a complete list of recommended constants, please visit www.humanoptics.com

¹ The word "aberration" as used in this document refers to "spherical aberration"
CL = Compact Line

TORICA-aA / -aAY

DIOPTER CATEGORY

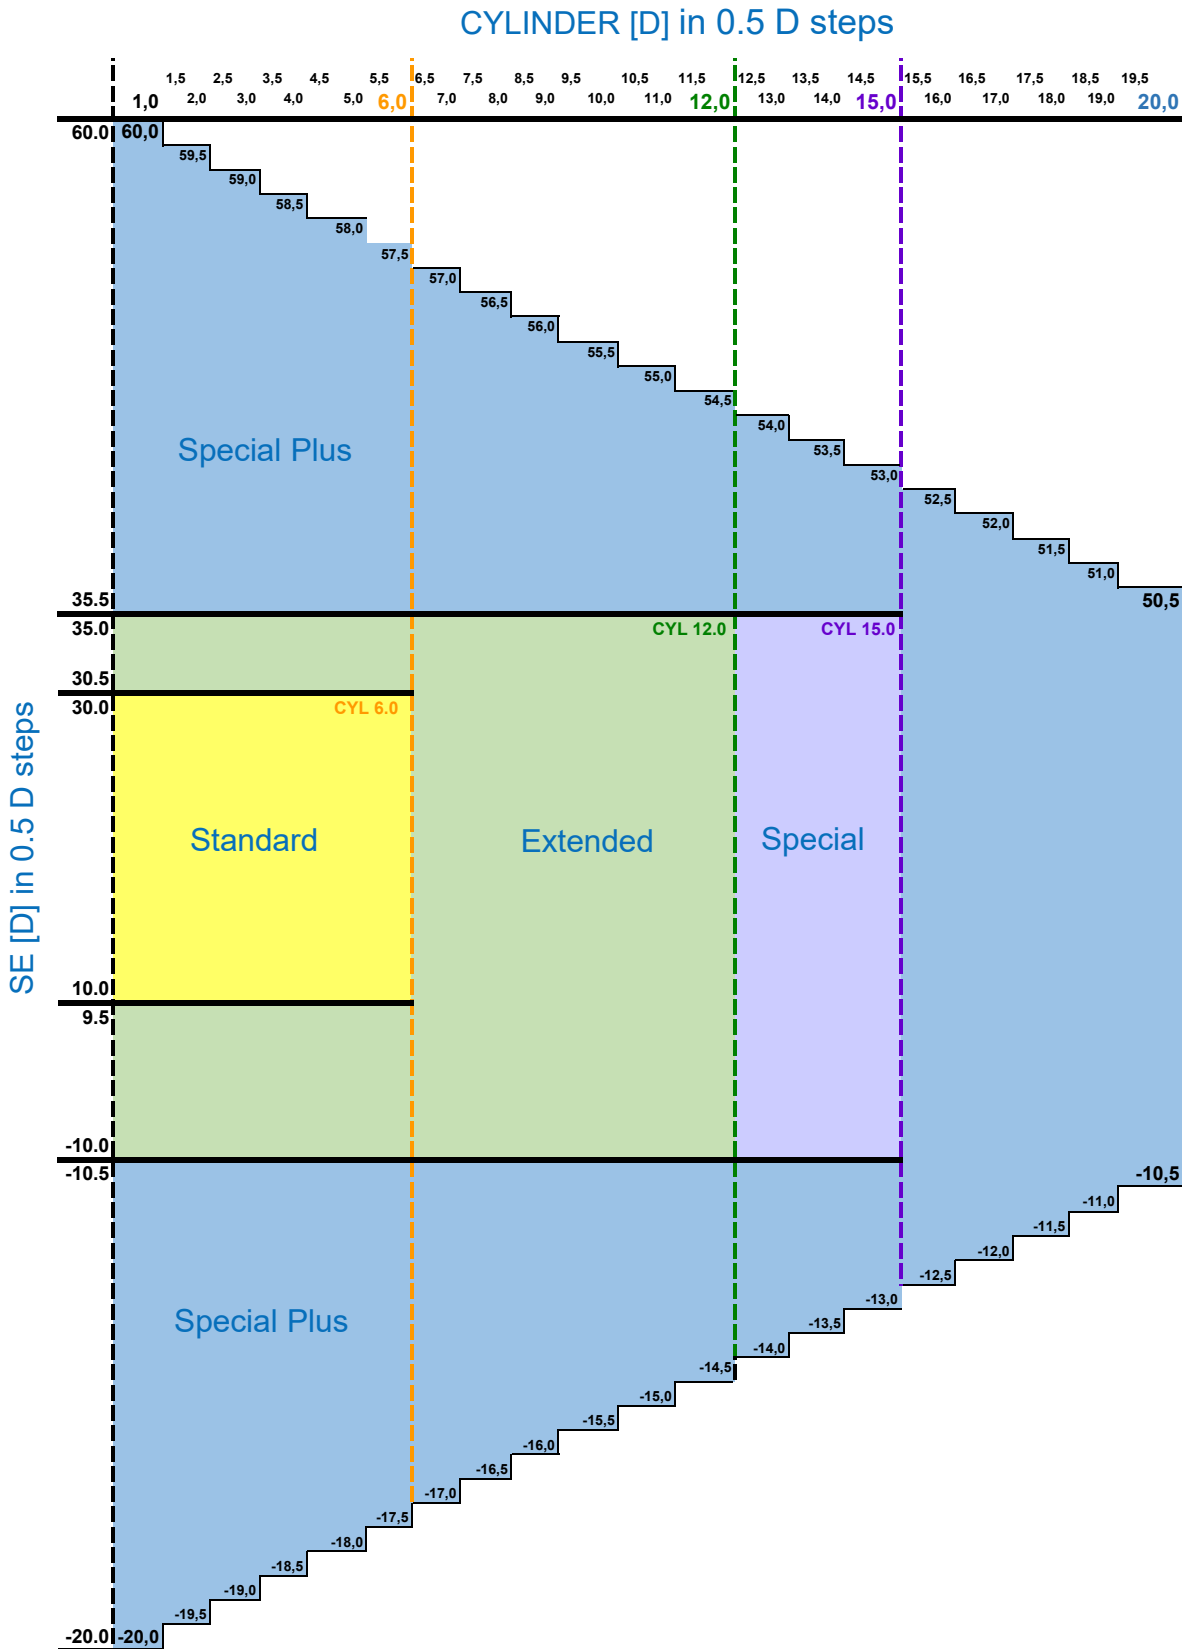

The dipter category does not indicate any conclusion related to supply availability. The delivery time of single powers might vary and is subject to change.